MODELS:

SR45UB / SR45UBEXP

SmartRack™ Premium Rack Enclosure

45 Rack Units

3000 lb Stationary Load Capacity

2250 lb Rolling Load Capacity

Heavy-Duty Casters

Locking Doors & Side Panels

Standard 19-inch Rack Width

Toolless Mounting Slots

Adjustable Rails with Easy-View Depth Index

Airflow Exceeds Server OEM Requirements

Integrated Baying Tabs

Square Hole Mounting

- A Adjustable Mounting Rails (4)
- B Adjustable PDU Mounting Rails with Toolless Mounting Slots (2 rails hold up to 4 vertical PDUs.)
- C Roof Panel (Removable)
- D Front Door (Lockable/Removable/Reversible)
- E Split Rear Doors (2) (Lockable/Removable)
- F Side Panels (4) (Lockable/Removable; not included with SR45UBEXP.)
- G Rolling Casters (4)
- H Levelers (4)
- I Keys (For doors and side panels.)

Also Includes: Owner's manual, 2 shipping/stabilizing brackets and rackmount equipment mounting hardware (50 cage nuts, 50 mounting screws, 50 nylon cup washers).

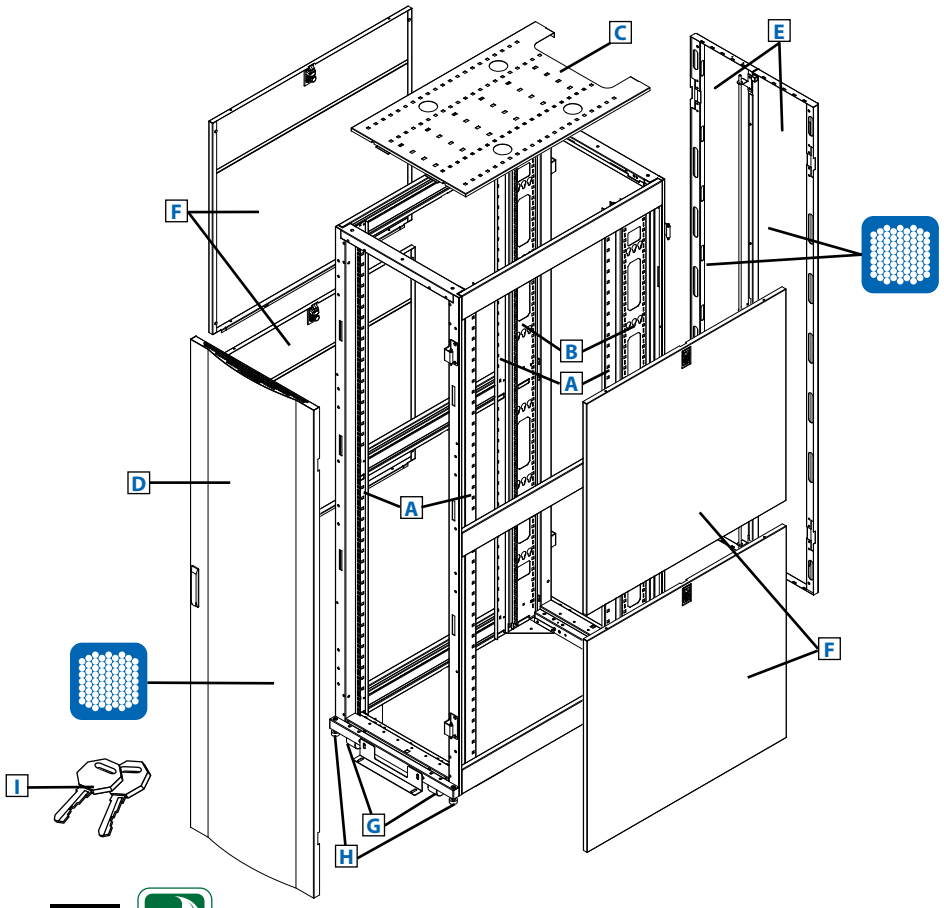

Specifications

Model	SR45UB
Rack Spaces	45U
Stationary Load Capacity	3000 lb (1363 kg)
Rolling Load Capacity	2250 lb (1022 kg)
Unit Dimensions (H x W x D)	83.75 x 23.63 x 43 in (2127 x 600 x 1092 mm)
Shipping Dimensions (H x W x D)	90.3 x 26 x 45 in (2294 x 660 x 1143 mm)
Unit Weight	307 lb (139.3 kg)
Shipping Weight	357 lb (161.9 kg)
Certifications	EIA-310-E, IEC 60297-3-100, DIN 41494, UL 60950, RoHS, NOM, IP20, PCI-DSS
Model	**SR45UBEXP** (Without side panels.)
Unit Weight	229 lb (103.9 kg)
Shipping Weight	279 lb (126.6 kg)

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

Also Available: Shock pallet models with special packaging to facilitate equipment pre-installation and reshipment to final site. Heavy-duty shock pallet holds up to 1250 lb (568 kg), including the weight of the enclosure and pre-installed equipment. Add "SP1" to model numbers above to order shock pallet models.

- Enclosures ship fully assembled for rapid deployment, but can be knocked down for easy reassembly in confined spaces
- Modular design optimized for quick configuration and reconfiguration
- Ideal for rackmount server, network and telecom applications

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS

TRIPP·LITE

1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com

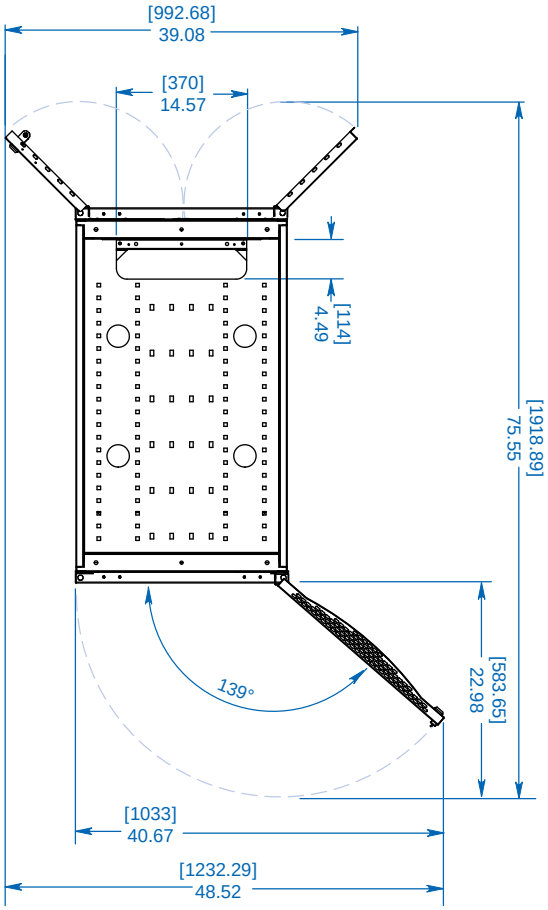

TOP VIEW

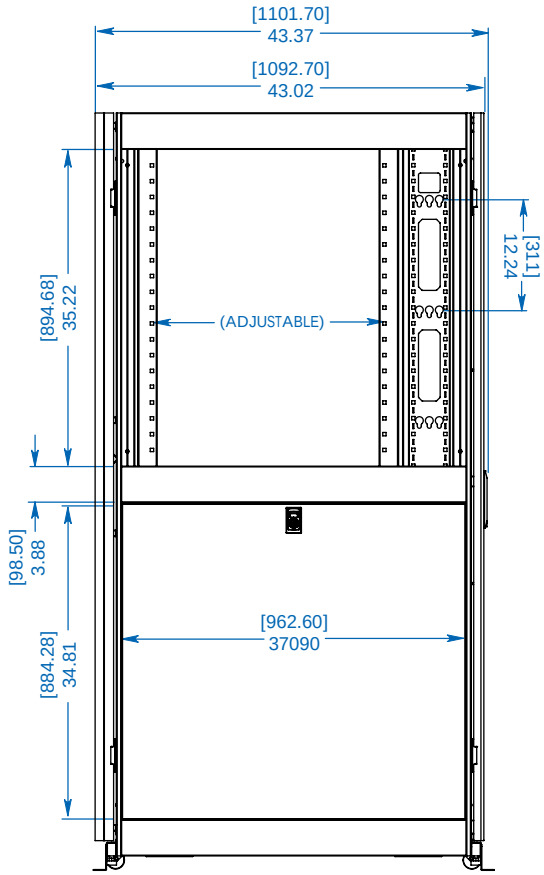

SIDE VIEW

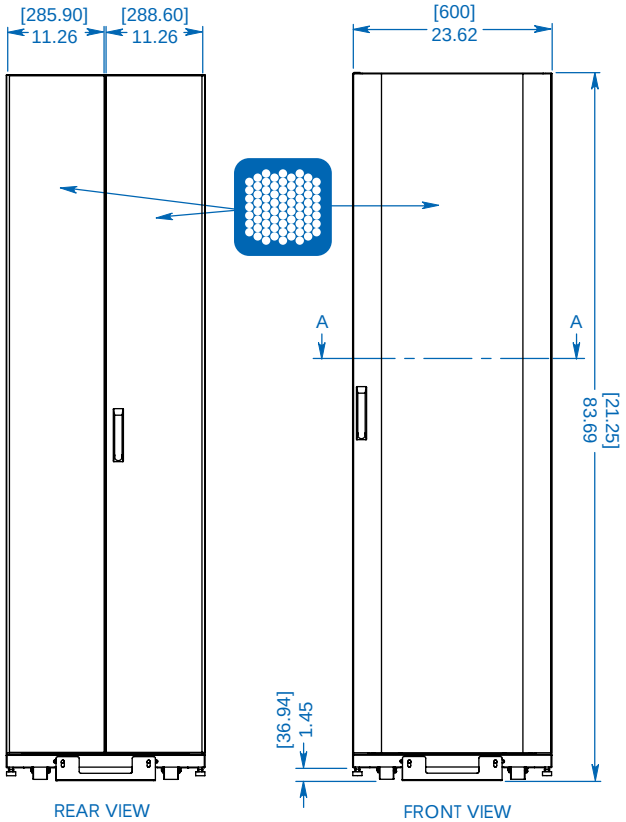

REAR VIEW FRONT VIEW

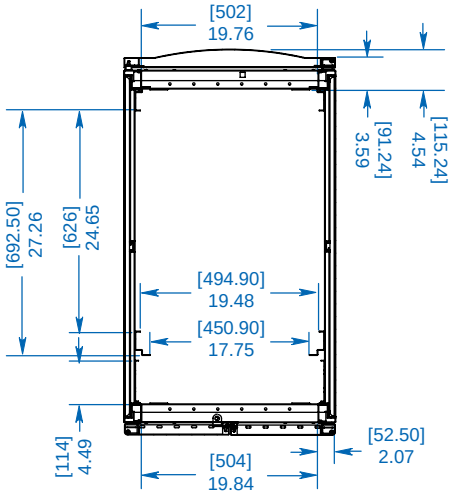

CROSS SECTION A

MODELS:

SR45UB

SR45UBEXP

TRIPP·LITE

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

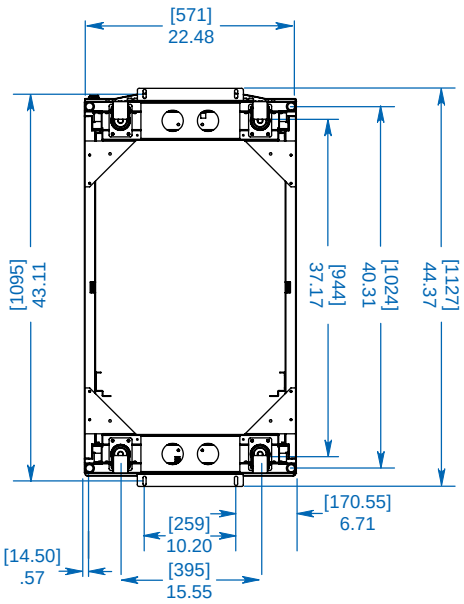

BOTTOM VIEW

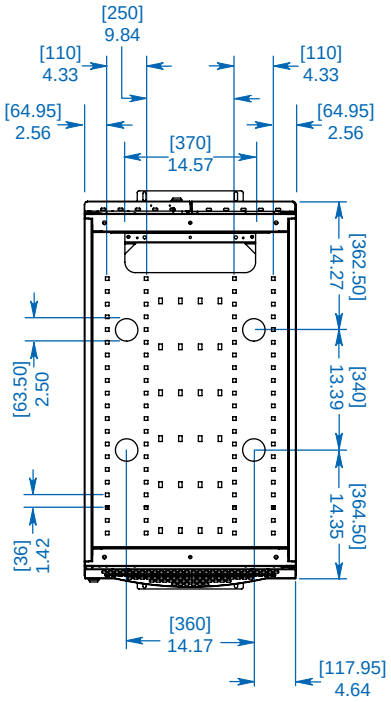

TOP VIEW

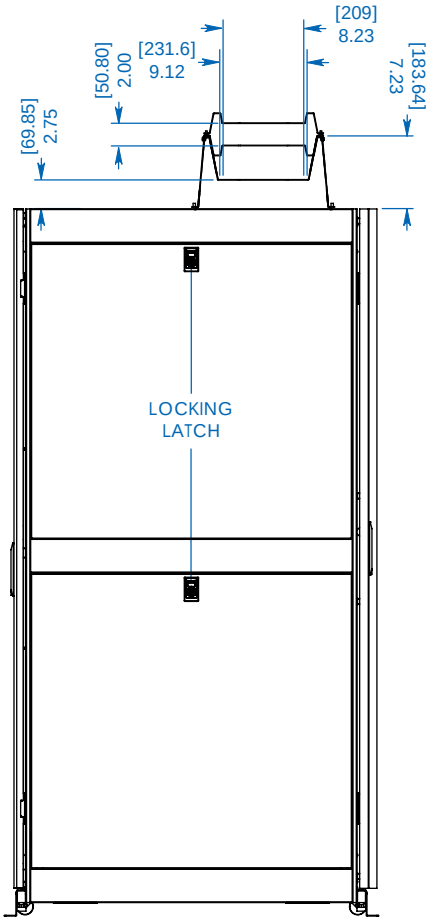

SIDE VIEW

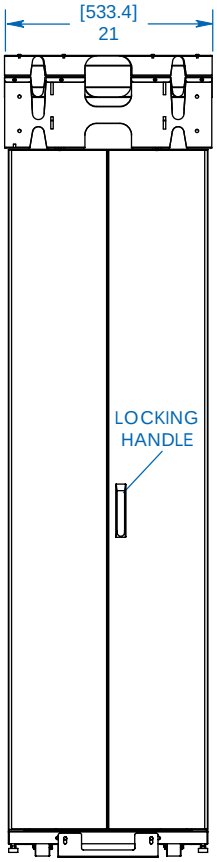

REAR VIEW

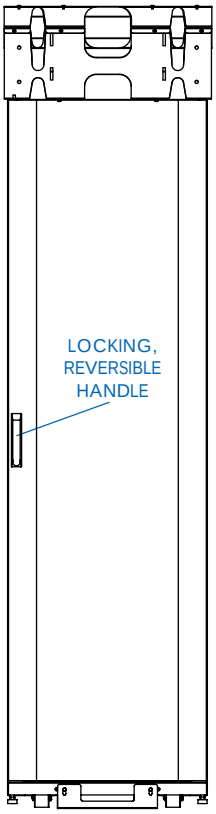

FRONT VIEW

OPTIONAL **SRCABLETRAY** AND **SRCABLETRAYEXP** CABLE MANAGEMENT ACCESSORIES SHOWN (MOUNTING POSITION ADJUSTS TO ACCOMMODATE A WIDE RANGE OF APPLICATIONS)

MODELS:

SR45UB
SR45UBEXP

TRIPP·LITE

1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

Copyright © 2012 Tripp Lite.